



## DLD3200-I 32" TFT LCD, 2000nits LED Backlight, 1920x1080

The DLD3200-I is 32 inch industrial grade sunlight readable LCD, with high brightness 2000 nits, it produces sharp images, crisp text and lifelike colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor application, kiosk, digital signage in retail stores, conference rooms, broadcast studios, public information.

### Key Features

- High brightness 2000nits
- Sunlight Readable
- Wide Operation Temperature (-30 °C ~70°C)
- LCD Blackening Defect Free (H-Tni 110 °C)
- Surface Treatment (Haze 28%)
- Low Power Consumption
- BL MTBF: 100,000 hours



### Specifications

<b>Model Name</b>	<b>DLD3200-I</b>
<b>Description</b>	32" TFT LCD, 2000nits LED Backlight, 1920x1080
<b>Screen Size</b>	32"
<b>Display Area (mm)</b>	698.40(H) x 392.85(V)
<b>Brightness</b>	2000 cd/m <sup>2</sup>
<b>Resolution</b>	1920x1080
<b>Aspect Ratio</b>	16 : 9
<b>Contrast Ratio</b>	6500 : 1
<b>Pixel Pitch (mm)</b>	0.36375(H) x 0.36375(V)
<b>Pixel Per Inch (PPI)</b>	69
<b>Viewing Angle</b>	178°(H),178°(V)
<b>Color Saturation (NTSC)</b>	82%
<b>Display Colors</b>	16.7M
<b>Response Time (Typical)</b>	9.5ms
<b>Panel Interface</b>	LVDS
<b>Input Interface</b>	DVI-I, HDMI, DP
<b>Input Power</b>	AC100~240V
<b>Power Consumption</b>	86W
<b>OSD Key</b>	4 Keys (Power Switch, Menu, +, -)
<b>OSD Control</b>	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
<b>Dimensions (mm)</b>	735.4 x 429.8 x 58.1
<b>Bezel Size(U/B/L/R)</b>	18.45/18.45/18.50/18.50 mm
<b>Mounting</b>	100x100mm, 200x200mm
<b>Weight (Net)</b>	11 kg
<b>Operating Temperature</b>	-30 °C ~ 70 °C
<b>Storage Temperature</b>	-30 °C ~ 70 °C

DLD= Panel + LED Driving Board + AD Control Board + Housing


Specifications are subject to change without notice.  
All brands or product names are trademarks or registered trademarks of their respective companies.





## Mechanical Drawing

### Outline Dimensions

Unit:mm

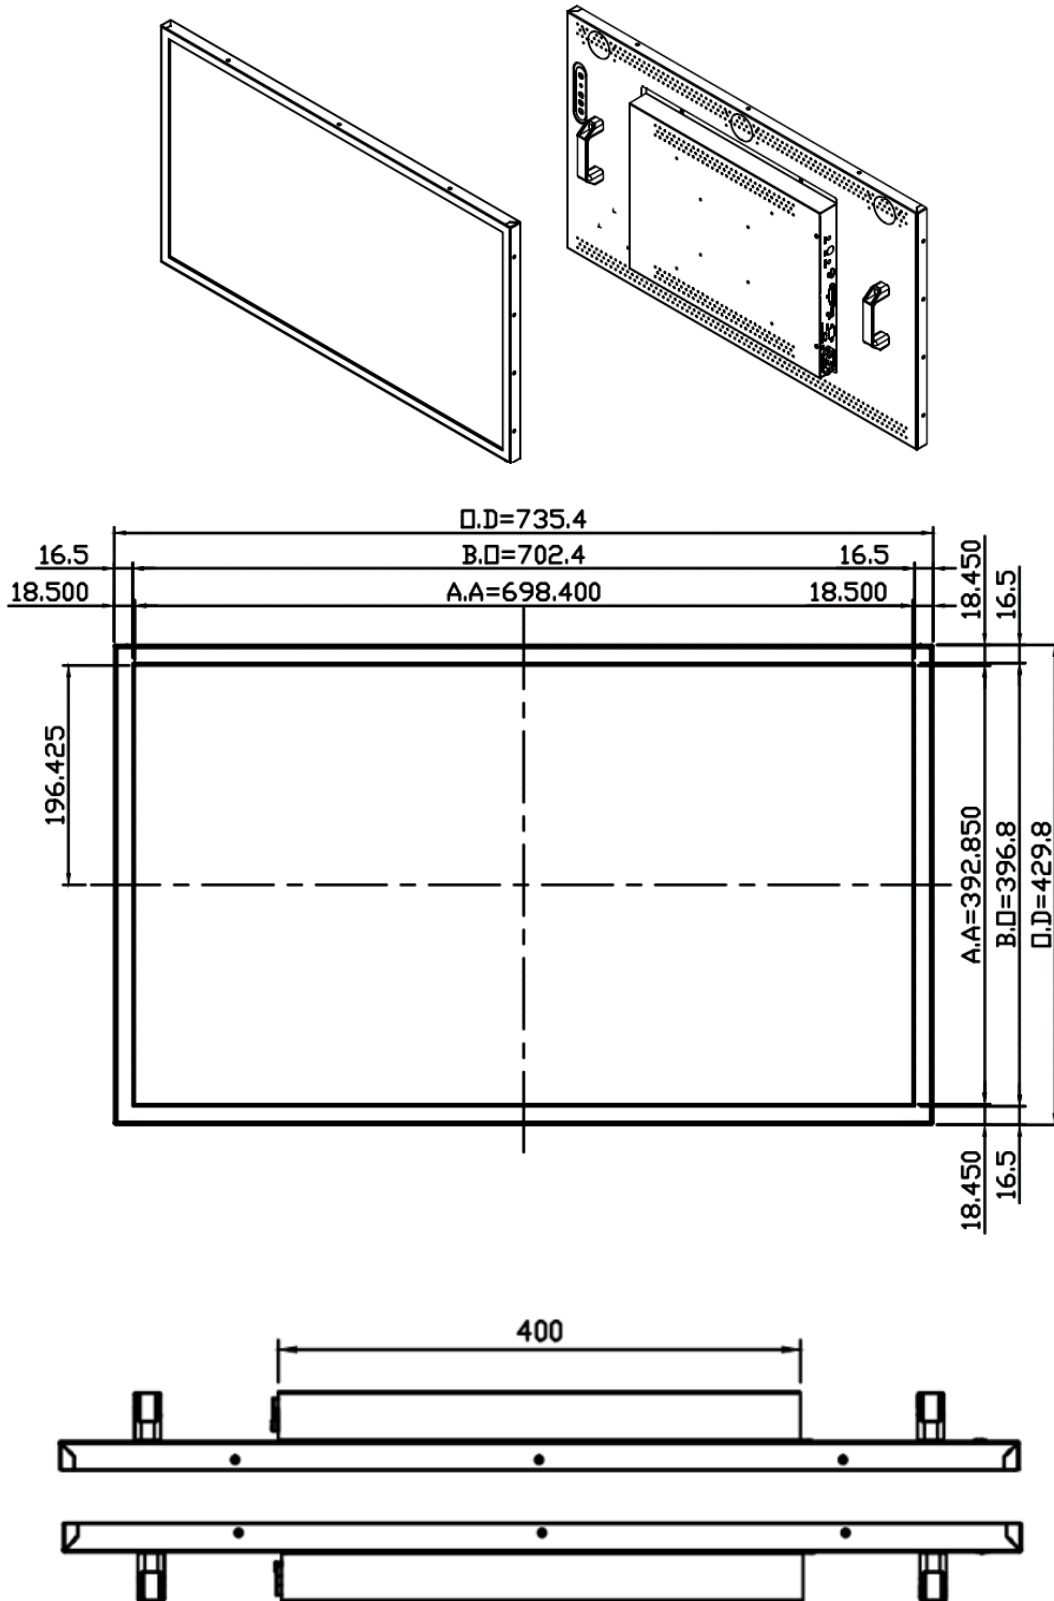

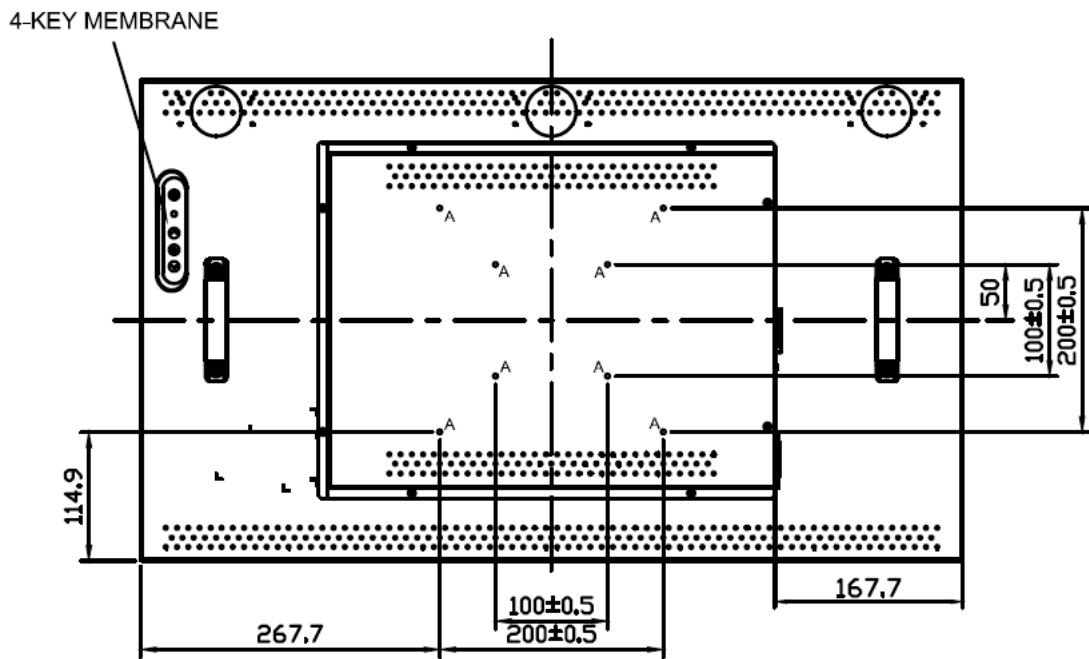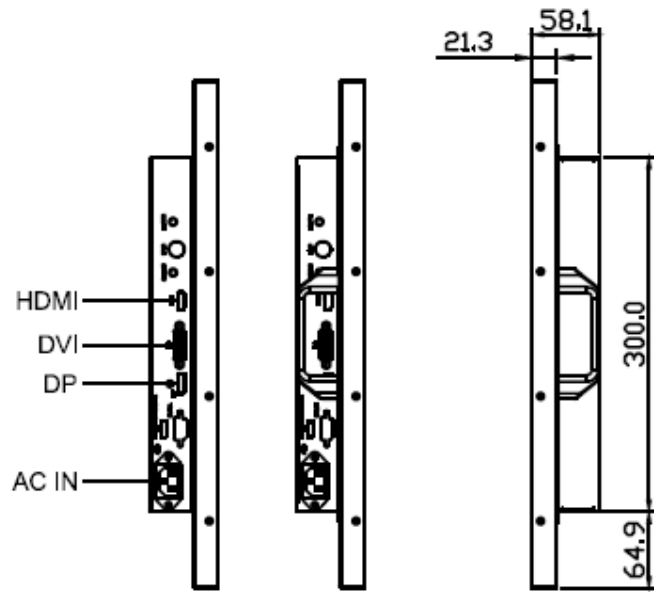

NOTE:  
 O.D : OUTLINE DIMENSION  
 B.O : BEZEL OPENING  
 A.A : LCD ACTIVE AREA  
 A: 8-M4\_USER\_HOLE\_MAX. DEPTH=6mm



### Ordering Information

Part Number	Description
DLD3200-INE-Q11	32",2000nits,1920x1080,T3070,HTni,Haze28%,LID32C,AD8891DHP,O/B,AC100~240V,2in1,V1

### Optional Accessories

Part Number	Description
810618301010	CABLE,POWER,AC,1830mm USA type
810618301090	CABLE,POWER,AC,1830mm Europe type
810618301050	CABLE,POWER,AC,1830mm UK type
810618301170	CABLE,POWER,AC,1830mm Australia type
810618301031	CABLE,POWER,AC,1830mm Japan type

### Customer request

Touch	Pcap (Multi-Touch)
Glass	Tempered glass, AR coating.....